



Contract
Wall
Solutions

Architectural Wall Systems
Clear, Concise, Conversations

FLEXX SOUL




SOUND
INSULATION



FIRE RATING:
E12.30




AUTOMATIC



PRIVATE



SEVERAL FINISHES

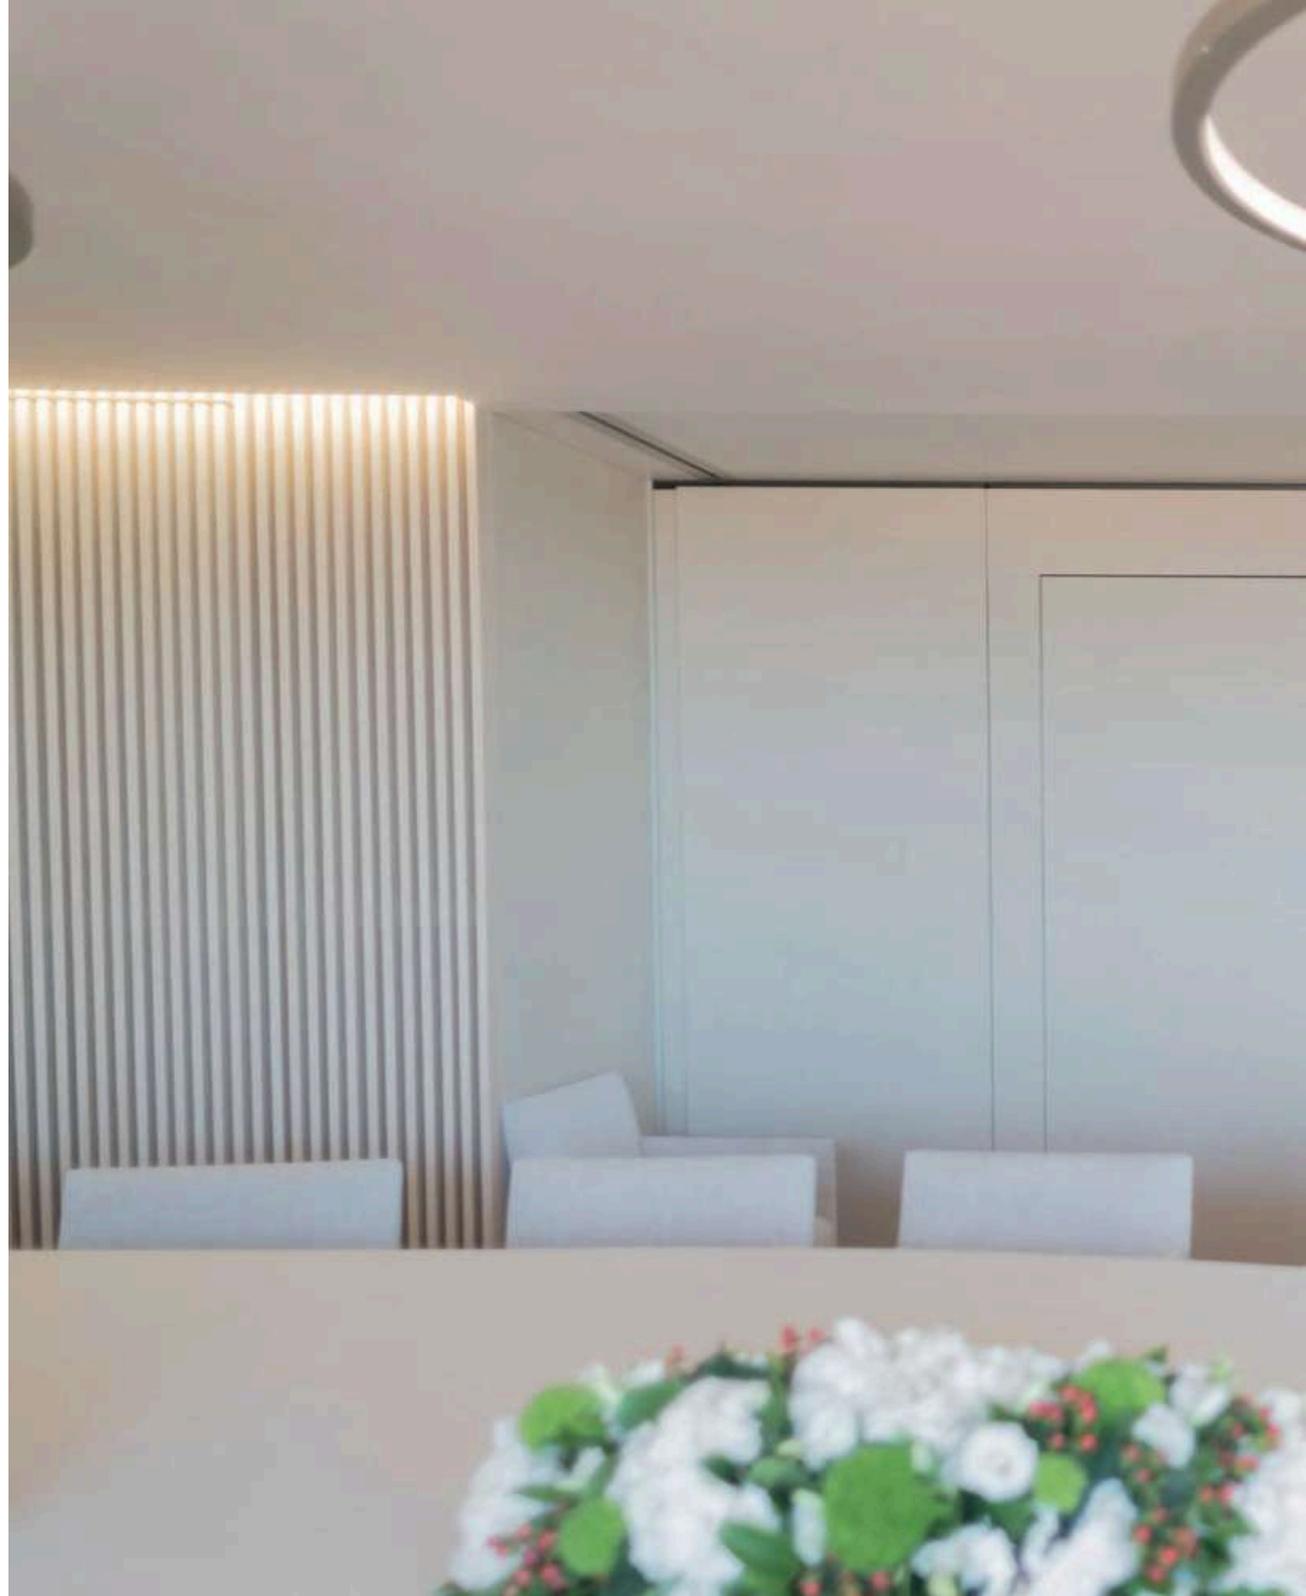




STANDARD PANEL
TELESCOPIC
SINGLE INSET PASSDOOR
DOUBLE INSET PASSDOOR
FULL-HEIGHT PASSDOOR
SEGMENTED CURVED



Soul Hotel



MICROSOFT- Soul

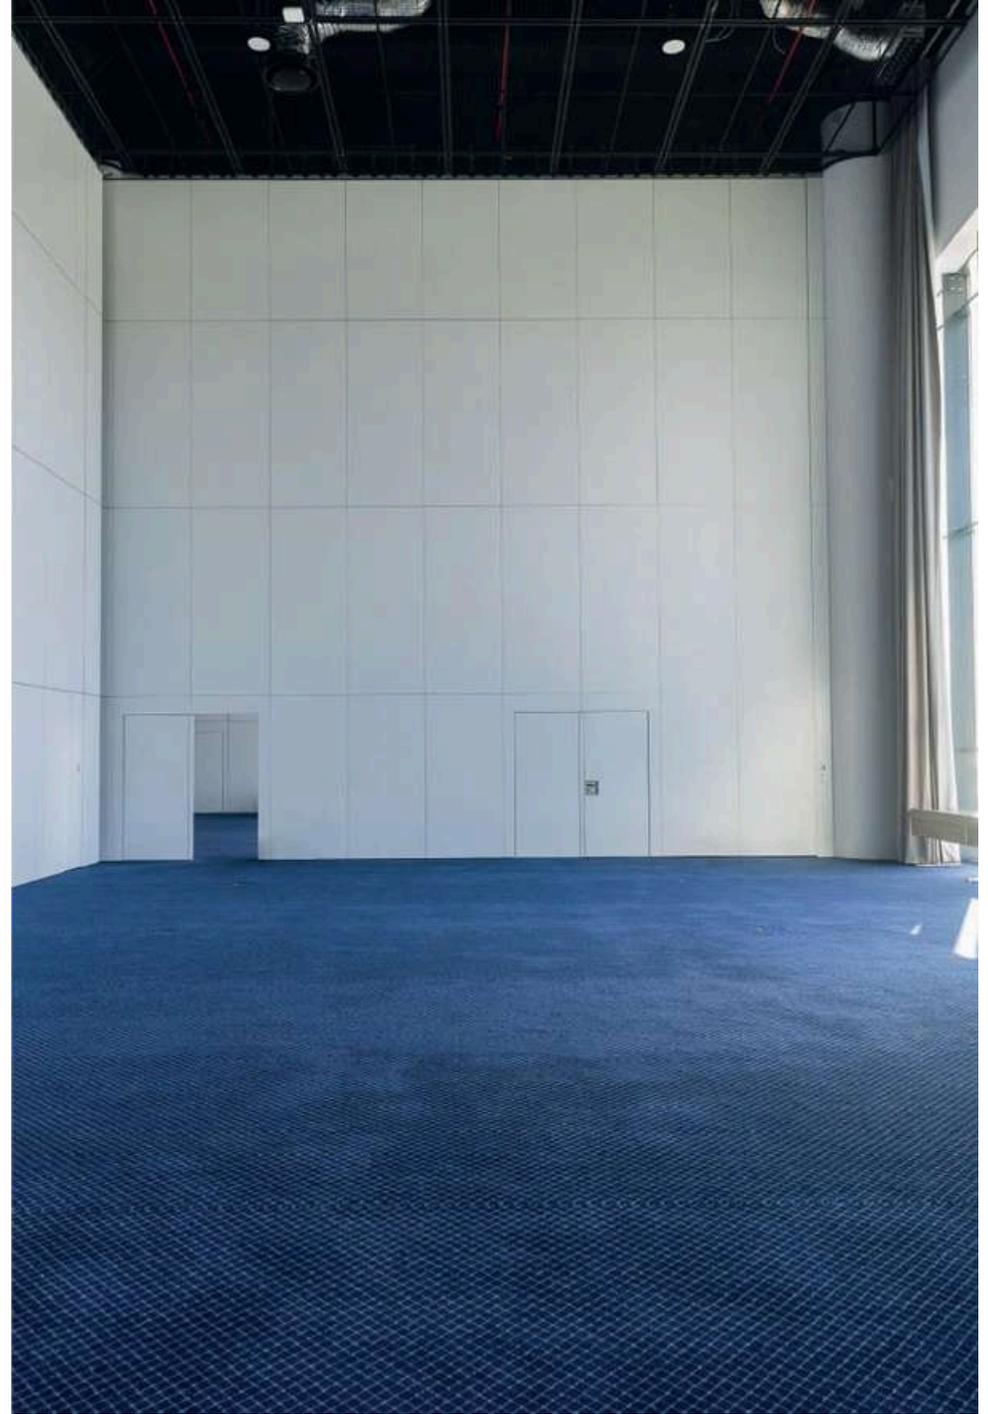

Exhibition Centre - Soul



SOUL



MICROSOFT, USA - SOUL



SOUL



SOUL




HOTEL-SOUL




SOUL

Stacking systems

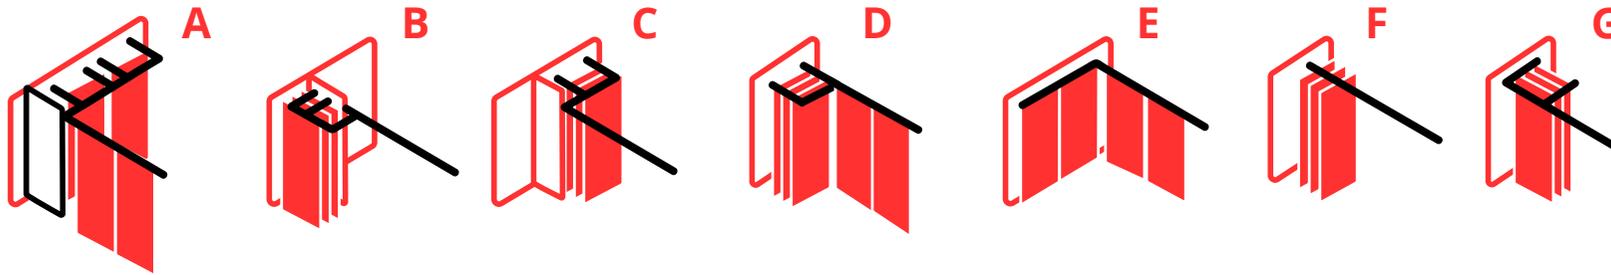

Panel's type

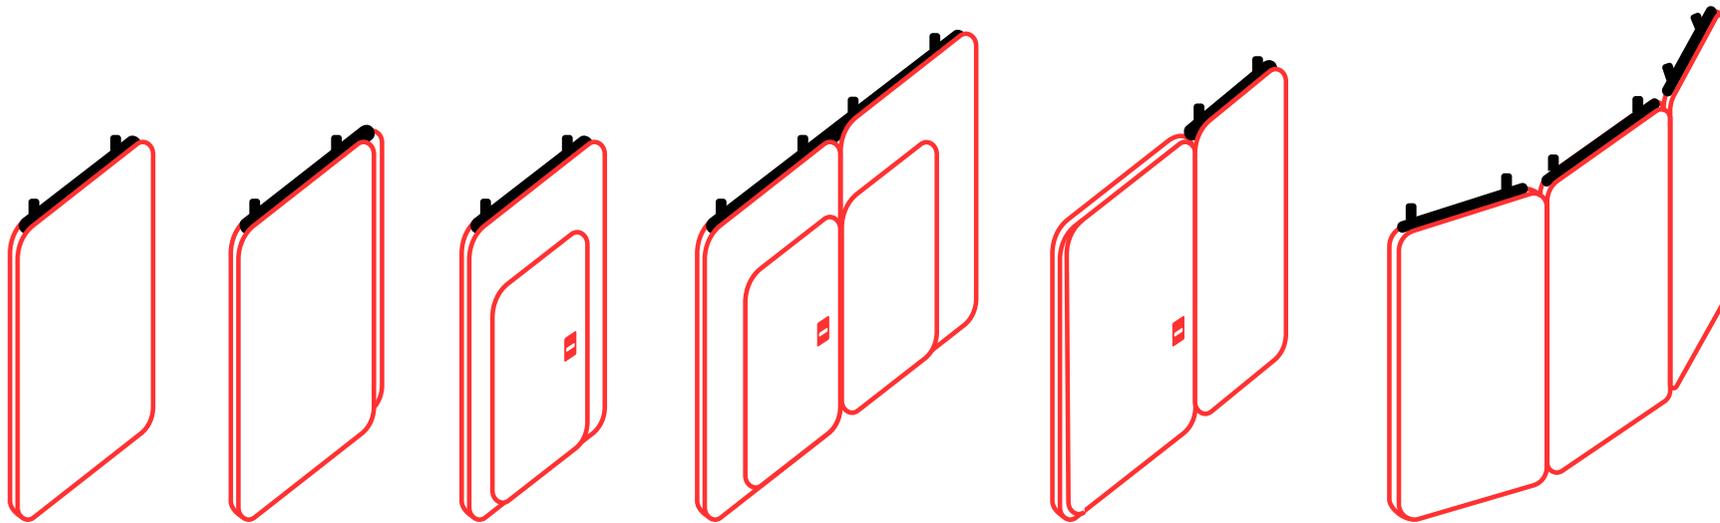

STANDARD
PANEL

TELESCOPIC


SINGLE INSET
PASSDOOR

DOUBLE INSET
PASSDOOR


FULL-HEIGHT
PASSDOOR

SEGMENTED
CURVED


Suspensions

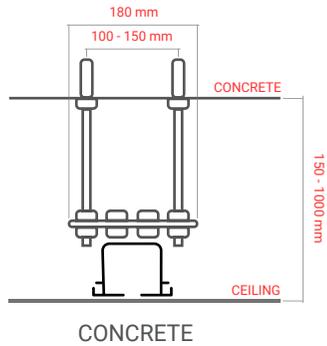


CONCRETE

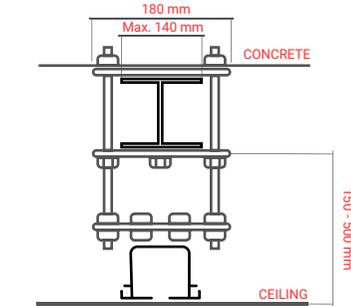


STEEL BEAM WITH 3 PLATES

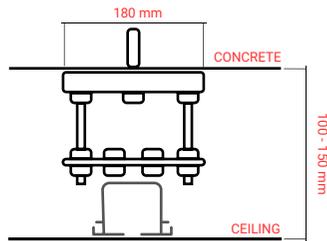


BENT PLATE

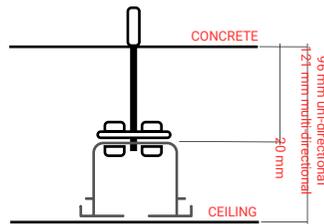

DIRECT

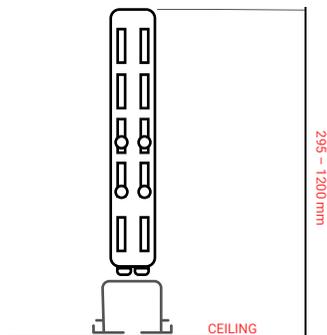


LONGITUDINAL

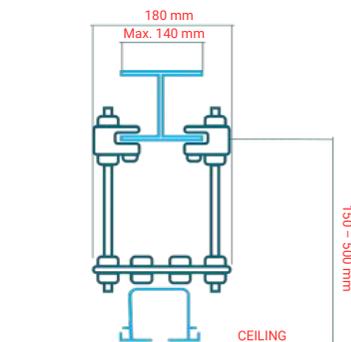


STEEL BEAM WITH CLAMPS


ceiling track

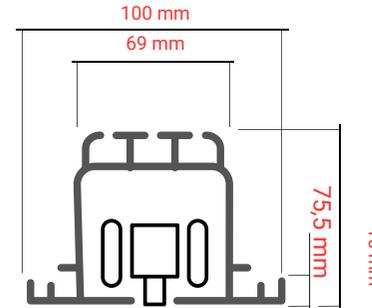

TRACK TYPE UD
Uni-Directional
Aluminium track profiles extruded from architectural grade 6063-T6 alloy.
Load bearing capacity: 358Kg per panel.

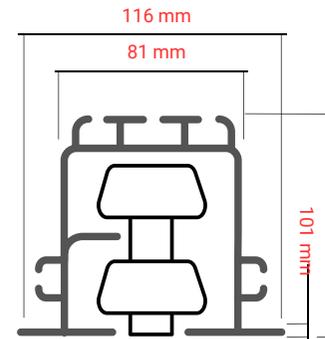

TRACK TYPE MDS
Standard
Multi-Directional
Aluminium track profiles extruded from architectural grade 6063-T6 alloy.
Load bearing capacity: 453Kg per panel.

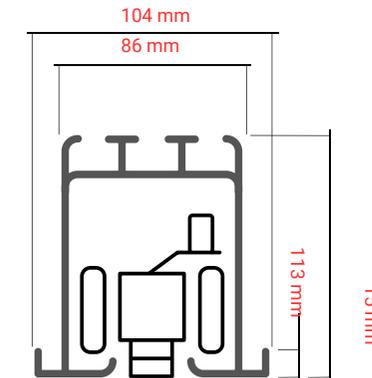

TRACK TYPE MDH Heavy Duty Multi-Directional
Aluminium track profiles extruded from architectural grade 6063-T6 alloy.
Load bearing capacity: 850Kg per panel.

FINISHES

MFC



U999 ST7 - Black



W980 ST7 - Platinum White



U961 ST7 - Graphite Grey



U708 ST9 - Light Grey



U156 ST9 - Sand Beige



H1277 ST9 - Light
Lakeland Acacia



H1732 ST9 - Sand Birch



H1910 ST9 - Willow Beech



H3840 ST9 - Natural
Mandal Maple

HPL



WRITABLE WHITE BRIGHT

Note: Colours may deviate slightly from those shown. Material available for immediate delivery from the supplier. For other options please refer to FINISHES COLLECTION.

TECHNICAL DATA TABLE

		STANDARD PANEL		FIXED TELESCOPIC JAMB		TELESCOPIC		SINGLEINSET PASSDOOR		DOUBLE INSET PASSDOOR		FULL-HEIGHT PASSDOOR	
Dimensions	Thickness in mm	116	122	116	122	116	122	116	122	116	122	116	122
	Width in mm	800 - 1300		> 200		800 - 1300		1200 / 1250 / 1300		2302		1010	
	Clear Opening Width in mm							765 / 815 / 865				815	
	Height in mm (Max.)	11000		11000		11000		11000		11000		11000	
Construction	Aluminium Profiles												
	Positive & Negative Aluminium Profiles	●		●		●		●		●		●	
Operation	Manual	●		●		●		●		●		●	
	Semi Automatic	●		●		●		●		●		●	
	Full Automatic	●		●		●		●				●	
Floor Track													
Technical Features	Soundproofing to ISO 10140-2:2010*	Rw (dB)	Density (kg/m ²)	Rw (dB)	Density (kg/m ²)	Rw (dB)	Density (kg/m ²)	Rw (dB)	Density (kg/m ²)	Rw (dB)	Density (kg/m ²)	Rw (dB)	Density (kg/m ²)
		42	39	42	39	42	39	42	39	42	39	42	39
		45	40	45	40	45	40	45	40	45	40	45	40
		47	45	47	45	47	45	47	45	47	45	47	45
		50	50	50	50	50	50						
		54	55	54	55	54	55						
Door Handles	Enclosed Handle							●		●		●	
	Pull Handle												
	Extra Handle							●		●		●	
Finishes	Powder Coating	●		●		●		●		●		●	
	HPL	●		●		●		●		●		●	
	MFC	●		●		●		●		●		●	
	MDF	●		●		●		●		●		●	
	Glass												
Special Finishes	●		●		●		●		●		●		
Electrically Controlled Blinds													
Switchable Glass													
Frosted Glass													

*Value obtained in a laboratory test in a controlled environment, in accordance with ISO 10140-2:2010 & ISO 717-1:2020.